

# RANKIN

## FORK ATTACHMENTS

**PALLET FORKS • 3-POINT FORKS**

**QUICK-ATTACH BUCKET FORKS**

**CLAMP-ON BUCKET FORK • TRASH FORKS**



***Innovative, Rugged & Labor Saving Attachments***



# LOADER PALLET FORKS

## COMPACT SERIES

### FEATURES:

- Fits many compact loaders
- Class I ITA forks are forged and heat-treated
- 2250 lb. capacity/pair @ 21" load center
- Adjustable rail style forks equipped with positioning latches
- 42" usable length fork tines
- Equipped with high visibility load guard




MODELS	LIFT CAPACITY	FORK LENGTH	TINE SIZE	LOADER MOUNTS	WEIGHT
ULF-2242	2250 lbs.	42"	1-1/4" x 3" Solid	Fits loader frames between 28-1/4"ID & 47-1/4"OD, 3/4" or 1" pins	280
JLF-2242	2250 lbs	42"	1-1/4" x 3" Solid	Fits J.D. compact loaders w/ quick-change attachment carrier	280
SSF-2242	2250 lbs	42"	1-1/4" x 3" Solid	Fits compact loaders w/ skid steer style quick couplers	280
YLF-2242	2250 lbs	42"	1-1/4" x 3" Solid	Fits Yanmar compact loaders w/ quick change attachment carrier	280

## UTILITY SERIES

### FEATURES:

- Fits many utility and skid steer loaders
- Class 2 ITA forks are forged and heat-treated
- 4000 lb. capacity/pair at 21" load center
- Adjustable rail style forks equipped with positioning latches
- Fork tines available in 42" & 48" usable lengths
- Equipped with high visibility load guard
- Custom models available on special order
- Skid Steer series equipped with walk through load guard
- Fork tines available in 42" & 48" usable lengths
- Equipped with high visibility load guard
- Custom models available on special order
- Skid Steer series equipped with walk through load guard

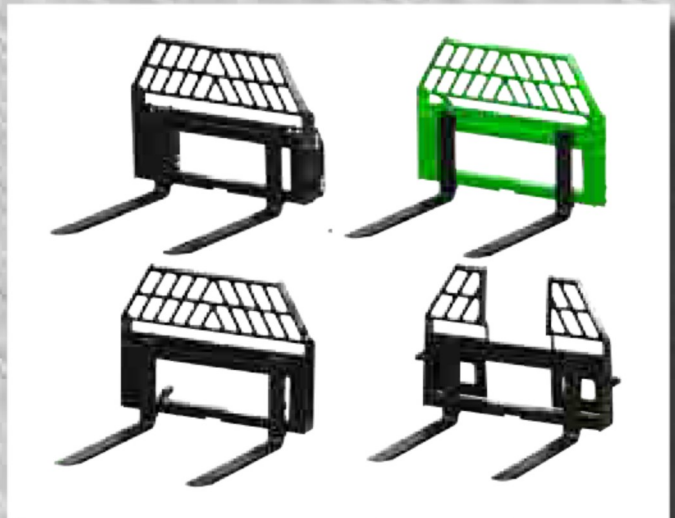

MODELS	LIFT CAPACITY	FORK LENGTH	TINE SIZE	LOADER MOUNTS	WEIGHT
ULF-3542	4000 lbs.	42"	1-3/8" x 4" Solid	Fits Loader Frames between 32"ID & 48"OD, 1 or 1-1/8" pins	370
ULF-3548	4000 lbs.	48"	1-3/8" x 4" Solid	Fits Loader Frames between 32"ID & 48"OD, 1 or 1-1/8" pins	385
GLF-3542	4000 lbs.	42"	1-3/8" x 4" Solid	Fits Euro Style Quick Coupler Tractor Loaders	380
GLF-3548	4000 lbs.	48"	1-3/8" x 4" Solid	Fits Euro Style Quick Coupler Tractor Loaders	400
JLF-3542	4000 lbs.	42"	1-3/8" x 4" Solid	Fits John Deere Loaders w/Quick-Change Attachment Carrier	380
JLF-3548	4000 lbs.	48"	1-3/8" x 4" Solid	Fits John Deere Loaders w/Quick-Change Attachment Carrier	400
SSLF-3542	4000 lbs.	42"	1-3/8" x 4" Solid	Universal Skid Steer Mount	375
SSLF-3548	4000 lbs.	48"	1-3/8" x 4" Solid	Universal Skid Steer Mount	395
PF42	4000 lbs.	42"	1-3/8" x 4" Solid	Universal Skid Steer Mount	342
PF48	4000 lbs.	48"	1-3/8" x 4" Solid	Universal Skid Steer Mount	352
PF42-FBG	4000 lbs.	42"	1-3/8" x 4" Solid	Universal Skid Steer Mount	348
PF48-FBG	4000 lbs.	48"	1-3/8" x 4" Solid	Universal Skid Steer Mount	358

**WARNING:** Loader Mounted Fork attachments are specifically designed to engage and load palletized materials. Do not use forks to handle large loads such as bales, posts, etc. and avoid carrying loose or shiftable loads as they can fall or roll back on to operator causing serious injury or death.

# 3-POINT FORKLIFTS

## 3-PT. SERIES

### FEATURES:

- 1200, 1500, 2000, 3500 lb. capacity
- 41" fork length for 1200, 1500, 1500A, & 2000 models
- 42" or 48" fork length for 3542, & 3548 models
- Adjustable fork widths for 1500A, 3542, & 3548 models



MODELS	LIFT CAPACITY	HITCH	FORK LENGTH	TINE SIZE	FORK CENTERS	WEIGHT
1200	1200 lbs.	Cat. 1	41"	2" x 4" x 3/16" Tubing	25"	115
1500	1500 lbs.	Cat. 1	41"	1" x 4" Solid	25"	160
2000	2000 lbs.	Cat. 1	41"	1-1/4" x 4" Solid	25"	180
1500-A	1500 lbs.	Cat. 1	41"	1-1/4" x 4" Solid	Adjustable 4" to 26"	300
3542	3500 lbs.	Cat. 1 & 2	42"	1-3/8" x 4" Solid	Adjustable 10" to 36"	300
3548	3500 lbs.	Cat. 1 & 2	48"	1-3/8" x 4" Solid	Adjustable 10" to 36"	315

# QUICK-ATTACH BUCKET FORKS



## UNIVERSAL SERIES

### FEATURES:

- Safety lock system to hold forks in place
- Patented forming process increases the bend and heel thickness by 20%
- Tines made of special boron steel and fully heat treated after bending
- Rods made of 4140 high carbon steel

Forks have a safety rating of three times the stated capacity (1200 lb. cap. forks - 2 times)

MODELS	CENTER LOAD CAPACITY	FITS BUCKET OPENINGS	TINE HEIGHT	TINE LENGTH	ADJ. WIDTH	ROD SIZE	TINE SIZE	WEIGHT
1200UNIV	1200 lbs.	25"	31"	36"	60"	1-1/4" X 5'	1" x 4"	185
2500UNIV	2500 lbs.	32"	38"	36"	60"	1-1/4" x 5'	1-3/8" x 4"	255
4000UNIV	4000 lbs.	40"	46"	42"	72"	1-1/4" x 6'	1-3/8" x 4"	320
6000UNIV	6000 lbs.	49"	55"	46"	72"	1-1/2" x 6'	1-3/4" x 4"	450
6000LB	6000 lbs.	40"	46"	46"	72"	1-1/2" x 6'	1-3/4" x 4"	415
6000LBE	6000 lbs.	40"	46"	60"	72"	1-1/2" x 6'	1-3/4" x 4"	440
8000UNIV	8000 lbs.	54"	61"	48"	72"	1-3/4" x 6'	2" x 5"	720
11000UNIV	11000 lbs.	67"	73"	48"	84"	2" x 7'	2" x 6"	950

**WARNING:** Loader Mounted Fork attachments are specifically designed to engage and load palletized materials. Do not use forks to handle large loads such as bales, posts, etc. and avoid carrying loose or shiftable loads as they can fall or roll back on to operator causing serious injury or death.

# CLAMP-ON BUCKET FORKS



## BF SERIES

### FEATURES:

- Mounts easily in seconds without tools
- Equipped with handles for ease in mounting
- Adjustable handles slide for additional leverage
- Safety rated at two times capacity

MODELS	LIFT CAPACITY	FORK LENGTH	USABLE TINE LENGTH	MAX. BUCKET LIP THICKNESS	TINE SIZE	WEIGHT
BF-1000	1000 lbs.	32"	32"	3/4"	2" x 3"	90
BF-1000W	1000 lbs	32"	32"	1-9/16"	2" x 3"	90
BF-2000	2000 lbs.	36"	36"	3/4"	2" x 3"	110
BF-2000W	2000 lbs.	36"	36"	1-9/16"	2" x 3"	110
BF-3000	3000 lbs.	42"	42"	1-1/4"	2" x 4"	150
BF-4000	4000 lbs	42"	42"	1-3/4"	2" x 4"	170
BF-6000	6000 lbs	49"	49"	2-1/4"	3" x 5"	275
BFS-2000	Fork Stabilizer, adjustable, stabilizes width of BF-1000 & BF-2000 from 26" to 45"					25
BFS-4000	Fork Stabilizer, adjustable, stabilizes width of BF-3000 & BF-4000 from 27" to 45"					28

# CLAMP-ON TRASH FORKS

## TF SERIES

### FEATURES

- Turns your material bucket into a trash bucket in less than a minute
- Two heavy screw-lock clamp brackets with handles
- 2" square, 1/4" wall tubing by 20" long
- Clamps fit deep into the bucket for added strength



MODELS	BUCKET SIZE	WIDTH	TINES	APPROX. SPACING BETWEEN TINES	WEIGHT
TF48	48"	46"	5	8-1/2"	160
TF54	54"	52"	5	10"	170
TF60	60"	58"	6	8-1/2"	180
TF66	66"	64"	6	10"	195
TF72	72"	70"	7	9"	210



Phone (800) 426-2009 (509) 453-8271

[www.rankinequipment.com](http://www.rankinequipment.com)