



FLBS-Series Loader Attachments

The FLBS-Series is designed for use on pin-on type front loaders, they can be paired with a set of optional pin-on or interfacing quick-attach brackets available for most of today's loaders. The FLBS-2200 and FLBS-3000 deliver outstanding hay-handling performance when used to transport round bales. FLBS-6000 is designed to transport two round bales at once, reducing trips across the field.



FLBS-3000



FLBS-2200

New image
to come

Model	Item No.	Description	Weight
FLBS-2200	832380	Single bolt-in forged spear with usable length of 42". Rated at 2,200 lbs. Single 1-1/4" diameter balance spear usable length 16". Optional interfacing brackets for most loaders are available.	121 lbs.
FLBS-3000	832385	Dual bolt-in forged spears with usable length of 42". Rated at 3,000 lbs. Optional interfacing brackets for most loaders are available.	136 lbs.
FLBS-6000	834160	Front loader dual bale handler. Transport two round bales at once. Unit is 76" x 24". Rated at 6,000 lbs. Requires loader brackets be welded to the unit.	250 lbs.



WARNING: Do not exceed weight lifting capacity of your loader. Damage to equipment or personal injury could occur.


FLBS-Series Loader Attachments

Handling large or mid-size rectangular bales is easier using one of our 3 or 4 spear models to perform the job. All models feature tapered “forged” spring steel spears. Optional pin-on brackets or interfacing brackets for most popular quick-attach front loaders are available. Select models are convertible for use on a 3-pt. hitch with the addition of the optional bolt-on ear assembly (not Quick Hitch adaptable).



FLBS-330/340 –
Shown as FLBS-330

Model	Item No.	Description	Weight
FLBS-330	832390	Triple bolt-in forged spears with usable length of 26". Spears are spaced 26-1/2" apart. Rated at 3,000 lbs. For handling mid-size square bales. Optional interfacing brackets for most loaders are available. Use of optional uprights 831095 are required to handle two bales.	164 lbs.
FLBS-340	832395	Triple bolt-in forged spears with usable length of 42". Spears are spaced 26-1/2" apart. Rated at 4,000 lbs. For handling larger square bales. Optional interfacing brackets for most loaders are available. Use of optional uprights 831095 are required to handle two bales.	198 lbs.
FLBS-432	832405	Four bolt-in spears with usable length of 26". Spears are spaced 24" apart. Frame is 79-1/2" wide for handling mid-size square bales. Optional interfacing brackets for most loaders are available. Use of optional uprights 831095 are required to handle two bales.	169 lbs.
FLBS-449	832410	Four bolt-in forged spears with usable length of 42". Spears are spaced 24" apart. Frame is 79-1/2" wide for handling large square bales. Optional interfacing brackets for most loaders are available. Use of optional uprights 831095 are required to handle two bales.	212 lbs.
Optional Bolt-in Uprights & Bolt-on Ear Assembly			
	831095	Optional bolt-in uprights for FLBS models 330/340/432/449 to allow handling two bales.	32 lbs.
	831815	Bolt on assembly allows select FLBS models (will not fit FLBS-2200) to be used on a Cat. II 3-pt hitch (requires 830345 standard brackets with 830358 bushing kit to make unit Quick Hitch compatible).	17 lbs.

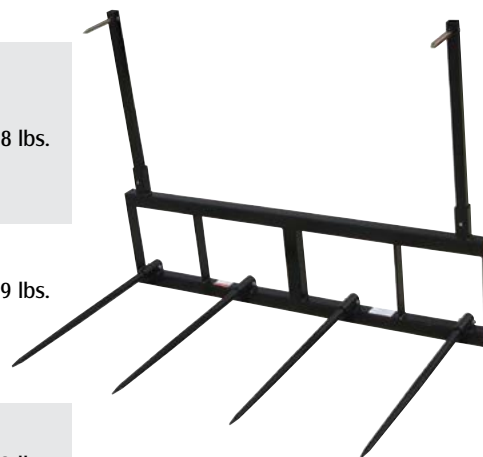

FLBS-449/432 –
Shown as FLBS-449
with optional uprights



WARNING: Do not exceed weight lifting capacity of your loader.
Damage to equipment or personal injury could occur.

Choose the **WORKSAVER** Way to Handle Your Hay