

HAYMAKER
HM300






Tedder Rake



HAYMAKER


HM300

Complete, for any type of hay processing.



The most complete universal Haymaker for crops. Excellent job in spreading, tedding or windrowing. High rate performance, very simple operation and sturdy construction: all these qualities can be found in our Haymaker 300. Our Haymaker 300 is fitted with wide tyres in order to improve ground adherence and obtain a better performance on rough terrains. Tines are positioned by centrifugal force and float at forage cut level to collect the

whole crop. Spreading and tedding: evenly moving and spreading of hay. Raking: at high working speeds you will get a soft and loose swath and a precise windrow separation. Adjustable deflectors: to prevent losses on terrain boundaries.

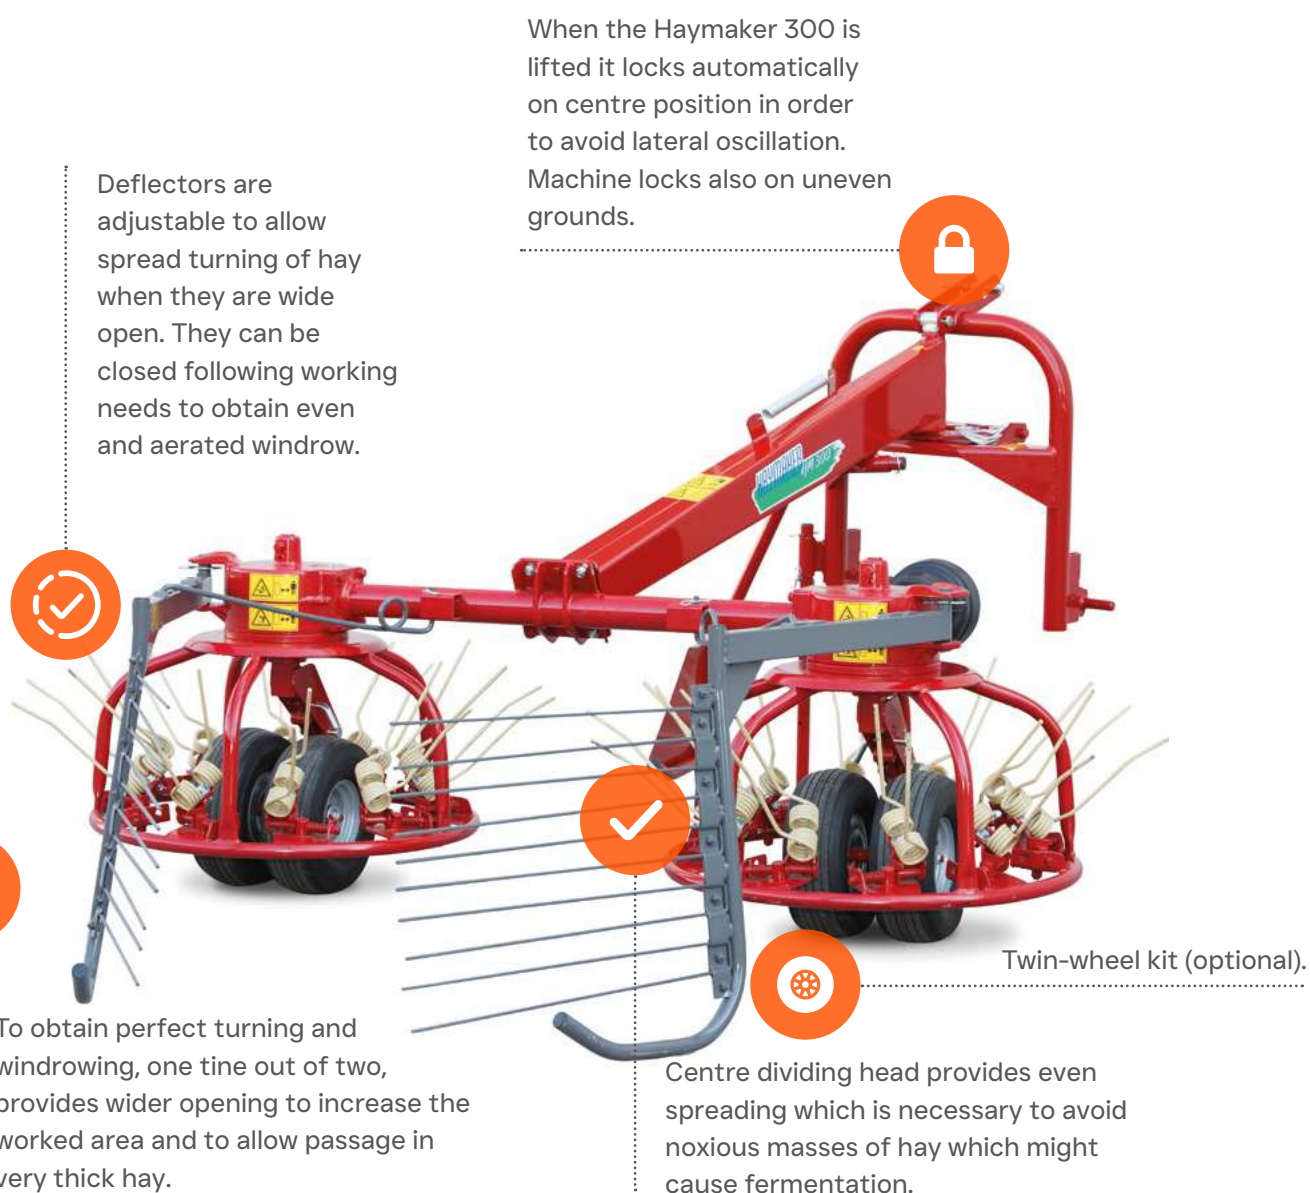

Specifications	HM300
Working width	119" - 3.02 m
Weight	726 Lbs - 330 kg
Transport width	91" - 2.31 m
Power required	20 HP - 15 kW
Rotors	r.p.m. 180
Height	31" - 0.79 m
Pto	r.p.m. 540
Pneumatic Tyres	15x6.00-6ply (n.2)
Double teeth	n. 20
Hitch type	three point

Designs, materials and/or specifications are subject to change without notice and without liability thereof.

Your partner in farming



Organization with certified Management System ISO 9001

Viale Grecia, 22 - 06018 Trestina (PG) - ITALY | **Phone:** +39 075.854.00.21 | **Email:** sitrex@sitrex.it | **www.sitrex.com**