







## **UNIVERSAL**


U400

## Universal 400, all in one machine.



Universal 400 rakes, teds, windrows and spreads, all in one machine. This new machine has been studied to meet the most advanced requirements in haymaking. Through simple adjustments it can be made suitable for all working conditions and it is very easy to operate.

Moreover, due to the pivoting wheels under the rotors, Universal 400 follows the tractor movements. The working width can be adjusted by extending the frame: from a min. width of 3.10 m up to a max. width of 4.00 m. For transport the machine is folded up to 2.25 m width. When spreading the tine arms are locked. When windrowing the tine arms are unlocked, i.e. they are set in the cam. To change from spreading into windrowing and vice versa it only takes a few minutes and it can be done on the field. The machine is fitted with wider tyres to increase ground adherence, particularly on rough terrains.

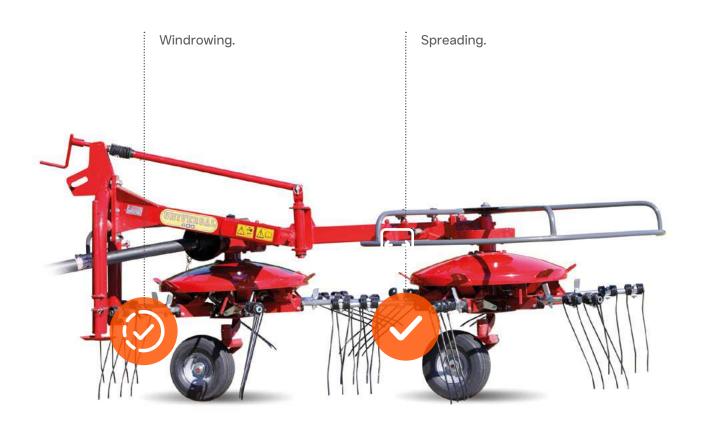







Tedding



Windrowing



Swath spreading



Swath tedding



Swath union



Borders clearing

Specifications	U400
Weight	925 Lbs - 420 Kg
Transport width	89" - 2.25 m
Power required	19 Kw - 25 Hp
РТО	r.p.m. 540
Working width when raking	126" - 138" / 3.20 - 3.50 m
Working width when windrowing	122" - 157" / 3.10-4.00 m
Highest working speed	9 Mph - 14 Km/h
Tine arms for rotor	6

Designs, materials and/or specifications are subject to change without notice and without liability thereof.

## Your partner in farming













Organization with certified Management System ISO 9001