HP 200-360

KW 147-264



## TECHNICAL SPECIFICATIONS AND STANDARD EQUIPMENT

- maximum horsepower: 360 HP (264 KW)
- PTO: 2-speed gearbox for 1000 rpm
   No. of teeth 16-29 = 284 rpm; 17-28 = 310 rpm
- · side transmission: gears
- 3-point hitch cat.3
- · swinging front hitches
- · central blade
- · rear tailgate, adjustment by hydraulic rams

- · leveling rollers, adjustment by hydraulic rams
- · rotor with double welded flange
- L-shaped blades: 80x10 mm (6 blades each flange, side blades leaning inwards)
- · max. working depth 25 cm
- side drive shafts with automatic safety device S.10
- central drive shaft S.12
- · rear lights for road transport
- · removable safety devices

W

S. TIGER 360P (T360P)				₽9	0	<b>\</b>	0	M	L	
	cm	cm	cm	HP / KW	Kg	Kg	Kg	Kg	No.	
500	516	491	264	200/147	3,300	3,300	3,600	3,420	114	Central drive
550	566	541	264	220/161	3,450	3,450	3,750	3,570	126	shaft S.12 L=952 tractor side 1"3/4 Z=20
600*	616	591	264	240/176	3,600	3,600	3,900	3,720	138	


S. TIGER 360P (T360P)	cage rollers		sp	ikes rollers	packer rollers		spiral rollers	
500								
550	500		560		555		470	
600*								

## OPTIONAL ACCESSORIES: 2-speed gearbox for 1000 rpm PTO different from standard version No. of teeth: 16-29 = 284 rpm; 13-32 = 208 rpm Oil cooling kit for central gearbox with reservoir



OPTIONAL ACCESSORIES:	
Oil cooling kit for side gearboxes with reservoir	
Oil cooling kit for side gearboxes with reservoir (supplied at a later time)	
Hitch with 4-ram lifting (mod.550)	
Rear rollers see page 209	
Floating system kit	
Extended swinging hitch cat. 3	
Extended swinging lower hitches cat. 3 (supplied at a later time)	
Front sod breaking discs	
Front track eraser (1 tine) for half unit only	
Front track eraser (2 tines) for half unit only	
BED FORMER VERSION	see page 145
BIO VERSION	see page 165

## Rollers adjustment by hydraulic rams (standard)

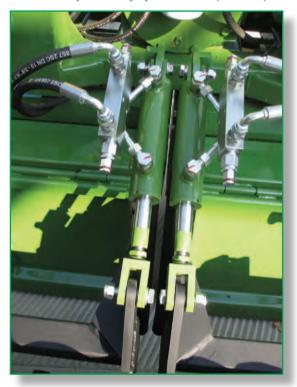

## Oil cooling kit for side gearboxes with reservoir (optional)

