


CLAMP-ON BUCKET FORKS

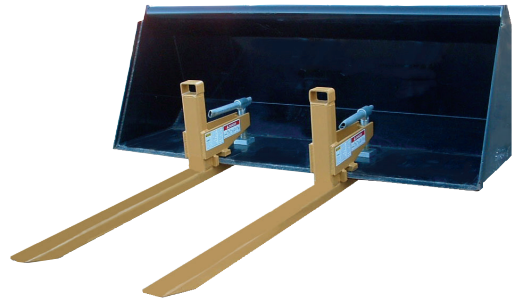

Stabilizer Bar

BF SERIES

FEATURES:

- Mounts easily in seconds without tools
- Equipped with handles for ease in mounting
- Adjustable handles slide for additional leverage
- Safety rated at two times capacity

MODELS	LIFT CAPACITY	FORK LENGTH	USABLE TINE LENGTH	MAX. BUCKET LIP THICKNESS	TINE SIZE	WEIGHT
BF-1000	1000 lbs.	32"	32"	3/4"	2" x 3"	90
BF-1000W	1000 lbs.	32"	32"	1-9/16"	2" x 3"	90
BF-2000	2000 lbs.	36"	36"	3/4"	2" x 3"	110
BF-2000W	2000 lbs.	36"	36"	1-9/16"	2" x 3"	110
BF-3000	3000 lbs.	42"	42"	1-1/4"	2" x 4"	150
BF-4000	4000 lbs.	42"	42"	1-3/4"	2" x 4"	170
BF-6000	6000 lbs.	49"	49"	2-1/4"	3" x 5"	275
BFS-2000	Fork Stabilizer, adjustable, stabilizes width of BF-1000 & BF-2000 from 26" to 45"					25
BFS-4000	Fork Stabilizer, adjustable, stabilizes width of BF-3000 & BF-4000 from 27" to 45"					28

CLAMP-ON TRASH FORKS



TF SERIES

FEATURES

- Turns your material bucket into a trash bucket in less than a minute
- Two heavy screw-lock clamp brackets with handles
- 2" square, 1/4" wall tubing by 20" long
- Clamps fit deep into the bucket for added strength

MODELS	BUCKET SIZE	WIDTH	TINES	APPROX. SPACING BETWEEN TINES	WEIGHT
TF48	48"	46"	5	8-1/2"	160
TF54	54"	52"	5	10"	170
TF60	60"	58"	6	8-1/2"	180
TF66	66"	64"	6	10"	195
TF72	72"	70"	7	9"	210



Specifications subject to change without notice

Innovative, Rugged & Labor Saving Attachments

www.rankinequipment.com

RANKIN

FORK ATTACHMENTS

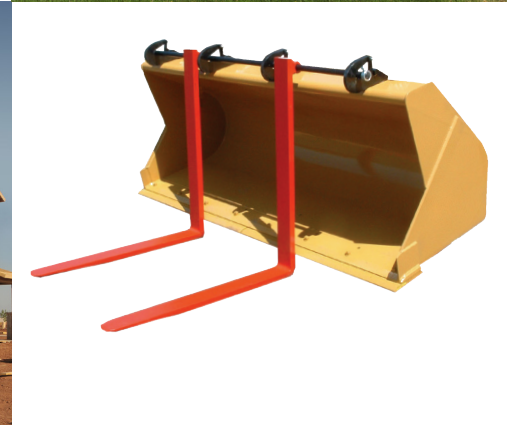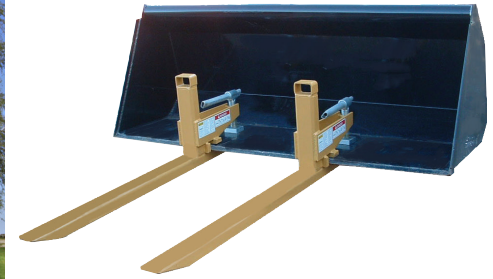

Innovative, Rugged & Labor Saving Attachments

www.rankinequipment.com

LOADER PALLET FORKS



COMPACT SERIES

FEATURES:

- Fits many compact loaders
- Class 1 ITA forks are forged and heat-treated
- 2250 lb. capacity/pair @ 21" load center
- Adjustable rail style forks equipped w/positioning latches
- 42" usable length fork tines
- Equipped with high visibility load guard

MODELS	LIFT CAPACITY	FORK LENGTH	TINE SIZE	LOADER MOUNTS	WEIGHT
SSF-1236	1200 lbs.	36"	1-1/4" x 3" Solid	Fits compact loaders w/ skid steer style quick couplers	175
SSF-1242	1200 lbs.	42"	1-1/4" x 3" Solid	Fits compact loaders w/ skid steer style quick couplers	195
ULF-2242	2250 lbs.	42"	1-1/4" x 3" Solid	Fits loader frames between 28-1/4"ID & 47-1/4"OD, 3/4" or 1" pins	280
JLF-2242	2250 lbs	42"	1-1/4" x 3" Solid	Fits J.D. compact loaders w/ quick-change attachment carrier	280
SSF-2242	2250 lbs	42"	1-1/4" x 3" Solid	Fits compact loaders w/ skid steer style quick couplers	280
YLF-2242	2250 lbs.	42"	1-1/4" x 3" Solid	Fits Yanmar compact loaders w/ quick-change attachment carrier	280



UTILITY TRACTOR/SKID STEER SERIES

FEATURES:


- Fits many utility and skid steer loaders
- Class 2 ITA forks are forged & heat-treated
- 4000 lb. capacity/pair at 21" load center
- Adjustable rail style forks equipped w/ positioning latches
- Fork tines available in 42" & 48" usable lengths
- Equipped with high visibility load guard
- Custom models available on special order
- Skid Steer series equipped with walk through load guard

MODELS	LIFT CAPACITY	FORK LENGTH	TINE SIZE	LOADER MOUNTS	WEIGHT
ULF-3542	4000 lbs.	42"	1-3/8" x 4" Solid	Fits Loader Frames between 32"ID & 48"OD, 1 or 1-1/8" pins	370
ULF-3548	4000 lbs.	48"	1-3/8" x 4" Solid	Fits Loader Frames between 32"ID & 48"OD, 1 or 1-1/8" pins	385
GLF-3542	4000 lbs.	42"	1-3/8" x 4" Solid	Fits Euro Style Quick Coupler Tractor Loaders	380
GLF-3548	4000 lbs.	48"	1-3/8" x 4" Solid	Fits Euro Style Quick Coupler Tractor Loaders	400
JLF-3542	4000 lbs.	42"	1-3/8" x 4" Solid	Fits John Deere Loaders w/Quick-Change Attachment Carrier	380
JLF-3548	4000 lbs.	48"	1-3/8" x 4" Solid	Fits John Deere Loaders w/Quick-Change Attachment Carrier	400
SSLF-3542	4000 lbs.	42"	1-3/8" x 4" Solid	Universal Skid Steer Mount	375
SSLF-3548	4000 lbs.	48"	1-3/8" x 4" Solid	Universal Skid Steer Mount	395

WARNING: Loader Mounted Fork attachments are specifically designed to engage and load palletized materials. Do not use forks to handle large loads such as bales, posts, etc. and avoid carrying loose or shiftable loads as they can fall or roll back on to operator causing serious injury or death.

Specifications subject to change without notice

QUICK-ATTACH BUCKET FORKS

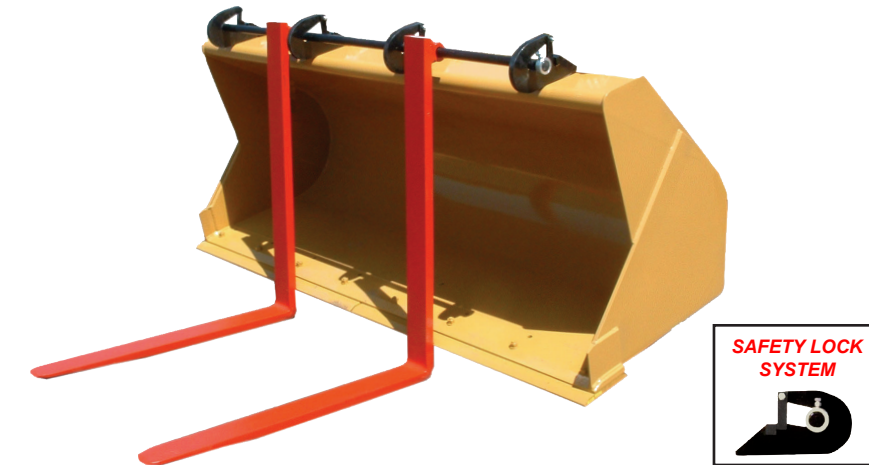

QUICK-ATTACH BUCKET FORKS provide increased production and versatility for Backhoes, Front End Loaders and other Bucket Mounted Equipment. Nine models available from 1200 lb. to 22,000 lb. capacity. Turns your loader into a forklift in seconds. Quick-Attach Bucket Forks often eliminate the need for a separate forklift truck on many job sites. A single set can be used by many operators making Rankin Quick-Attach Bucket Forks a cost effective solution to your material handling needs. Installation requires welding mounting brackets to the bucket's top lip or spill plate. The forks then mount easily in seconds by simply curling the bucket and driving into the forks - then leveling the bucket, forks automatically locking place.

FEATURES:

- Safety lock system to hold forks in place
- Patented forming process increases the bend and heel thickness by 20%
- Tines made of special boron steel and fully heat treated after bending
- Rods made of 4140 high carbon steel
- Forks have a safety rating of three times the stated capacity (1200 lb.capacity forks - 2 times)
- Capacities from 1,200 to 22,000 pounds
Add 3rd tine: 16,500 lb. capacity
Add 4th tine: 22,000 lb. capacity



Models	Max. Load Capacity Tine Ctr	Fits Bucket Openings	Tine Height	Tine Length	Adj.Width	Weight	Rod Size	Tine Size	No. Of Brackets
1200UNIV	1200 lbs.	25"	31"	36"	60"	185 lbs.	1-1/4" x 5"	1" x 4"	3
2500UNIV	2500 lbs.	32"	38"	36"	60"	255 lbs.	1-1/4" x 5"	1-3/8" x 4"	3
4000UNIV	4000 lbs.	40"	46"	42"	72"	320 lbs.	1-1/4" x 6"	1-3/8" x 4"	4
6000LB	6000 lbs.	40"	46"	46"	72"	410 lbs.	1-1/2" x 6"	1-3/8" x 4"	4
6000UNIV	6000 lbs.	49"	55"	46"	72"	460 lbs.	1-1/2" x 6"	1-3/4" x 4"	4
8000UNIV	8000 lbs.	54"	61"	48"	72"	720 lbs.	1-3/4" x 6"	2" x 5"	4
*11000UNIV	11000 lbs.	67"	73"	48"	84"	950 lbs.	2" x 7"	2" x 6"	4

Specifications subject to change without notice